

Side Spreader

Models: 800 / 1000



Designed to handle a wide range of manure from solid to slurry, the Hi-Spec Side Spreader is one of the leading side spreaders on the market today.

Once in operation it unloads fast and gives an even, consistent spread pattern. It features a strong chassis frame giving maximum support, durability and strength to the main drum.

All machines are finished with two coats of paint, an anti-corrosive primer and an enamel finish, giving a high quality long lasting finish.



Standard Features

- Strong chassis frame
- Heavy duty flails & case hardened 12mm chain
- 168mm diameter flail rotor
- Hydraulically operated lid
- Hydraulic brakes
- Breakaway safety handbrake
- Heavy duty fully welded construction
- Shot blasted to give well bonded long lasting paint finish
- High quality two coat paint finish

Optional Extras

- Automatic chain oiler
- Central greasing point (Optional on 800) (standard on 1000)
- LED Lights
- Reduction gear for lower HP tractors

HI-SPEC ENGINEERING LTD

Station Road

Bagenalstown

Co. Carlow, Ireland

Tel: +353 (0) 59 9721929

+353 (0) 59 9721992

Fax: +353 (0) 59 9721980


Web: www.hispec.net

E-mail: sales@hispec.net

Built as the Name Suggests

Technical Data

Model		800	1000
Loading Height	A	1500mm / 4'11"	1680mm / 5'6"
Overall Length	B	4725mm / 15'6"	5430mm / 17'10"
Overall Width	C	2500mm / 8'3"	2550mm / 8'5"
Overall Height	D	2490mm / 8'2"	2540mm / 8'4"
Body Length	E	3000mm / 9'10"	3625mm / 11'10"
Diameter	F	1525mm / 5'	1525mm / 5'
Rotor Speed		229 rpm	229 rpm
Unladen Weight		1700kg	2180kg
Lid Thickness		3mm	3mm
Body Thickness		5mm	5mm
Wheel Size		15x22.5	550/60-22.5
H.P. Requirement		75hp	90hp

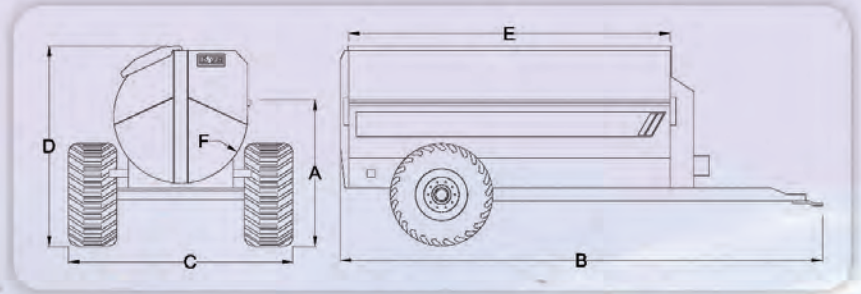

Tyre Options

1	2	3	4	5	6	7
15x22.5	550/60-22.5	16.5x22.5	B20	21.3 R24	600/50-22.5	18 R22.5
W – 385 (15")	W – 550 (21")	W – 420 (16")	W – 530 (20")	W – 540 (21")	W – 600 (23")	W – 455 (18")
D – 1080 (42")	D – 1230 (48.5")	D – 1100 (44")	D – 1280 (51")	D – 1400 (55")	D – 1170 (46")	D – 1160 (45.5")

While every attempt will be made to adhere to specific tyre sizes, due to circumstances beyond our control, these may change from time to time

It is the policy of Hi-Spec Engineering to improve its products whenever it is possible and practical to do so. We reserve the right to make changes or improvements at any time without incurring any obligation to make such changes to products previously sold. All information in this brochure is correct at time of printing. ©HI-SPEC 2010

Alternative tyre options available on request