

Hi-Spec Chassis Dribble Bar

Hi-Spec Engineering's chassis mounted dribble bar is the most robust dribble bar in the Irish market. Manufactured in Ireland, the Hi-Spec dribble bar is built to withstand harsh weather and terrain conditions.

Our chassis mounted dribble bars provide a factory fit solution for low emission spreading.

Our 7.5m dribble bar is supported on box frames so that the full weight is transferred to the tank chassis. Additional reinforcement is placed along the chassis during manufacture to support the dribble bar. There is no weight carried on the rear manhole.

Weighing in at just 500kg, the dribble bar is lightweight yet fully galvanised. The frame is tied to the dished end for stability. The distributor and arms are carried on the fixed mast, and both arms are spring loaded for protection.





A junction box is attached for rear filling, additional stone collection and splash plating. The box has an outlet underneath for the removal of stones. Large diameter 40mm outlet pipes allow a precise flow of slurry to the lay-flat hosing. The lay flat hosing boasts high ground clearance, which is beneficial over uneven ground.

Our dribble bars are available in 7.5m, 9m and 10.5m working widths, and feature Hi-Spec's innovative new macerator with three double-sided blades on each side. The long-life blades are internally tensioned via springs and are self-sharpening against the cutting screen. The macerator can be run in either direction to ensure the blades wear evenly over time.

The dribble bar is also easily removable. By removing the top pin, the dribble bar can be lifted up and away, allowing the tanker to revert to a conventional setup. All hydraulics connections are quick release.

Agricultural Engineering Excellence Since 1988

Since 1988, Hi-Spec Engineering has been providing the agriculture industry with agricultural engineering excellence. Hi-Spec Engineering is an international pioneer in dribble bar production. We design, manufacture, and distribute the most reliable, robust, and innovative systems for agriculture, including slurry tankers, macerators, dribble bars, and more.

Talk with our team today about the Hi-Spec Chassis Dribble Bar




E: info@hispec.net T: + 353 59 97 21929 W: hispec.net







Hi-Spec Chassis Dribble Bar Specifications & Features

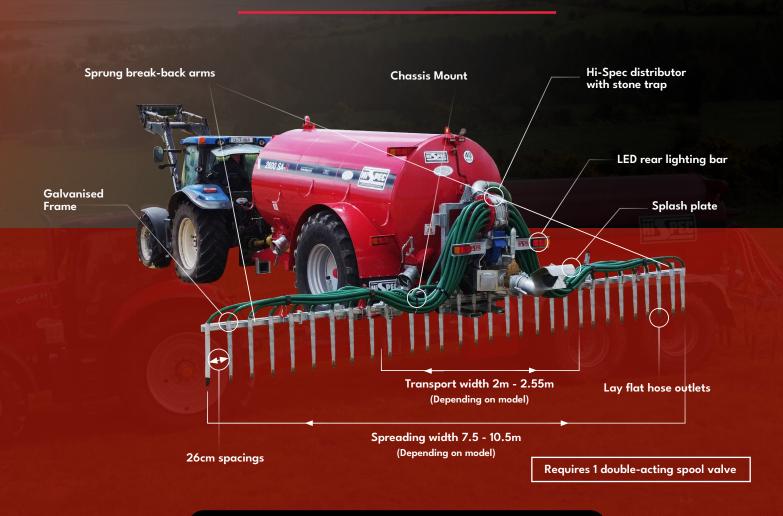

Ask Us About Available Grant Aid

Dribble Bar Model Variations

Model	Weight	Outlets	Outlet Spacing	Transport Width
7.5M	450kg	30	26cm	2.0m
9.0M	700kgs	36	26cm	2.55m
10.5M	800kgs	42	26cm	2.55m



E: info@hispec.net
T: + 353 59 97 21929
W: hispec.net



